

HEATER/PROOFER CABINET



PROJECT:

 ITEM NUMBER:

 MODEL NUMBER:

SPECIFICATIONS FOR: HP6A-LX

- **Application:** Multi-purpose design provides heat for holding as well as heat and humidity for proofing. Also serves as a mobile heated transport cabinet.
- **Construction:** 14 gauge aluminum body and 14 gauge galvanized caster base, non-insulated, adjustable damper, removable louvered, back mounted vent stack for even heat distribution.
- **Hardware:** Polycarbonate door, 270° door swing, hinged right, field reversible, with positive latch handle. (4) 5" standard duty swivel-plate casters with modulus wheels, factory mounted (2 with brakes).
- **Electrical:** 2000 watt heating unit, 120v, 60 Hz, supplied with cordset having NEMA 5-20 amp plug. 12 hour timer for proofing mode.
- **Thermostat Range:** Heating: 80° F – 185° F Proofing: 80° F - 135° F
- **Ledge Load:** (Max): 30 lbs per ledge.
- **Ledge Spacing:** Standard ledge spacing: 3" Ledge spacing can also be adjusted to 3 3/4", 4 1/2", 5 1/4", 6" and 6 3/4" without additional ledges. 17 sets of universal angle ledges standard.
- **Pan Accommodations:** 18" x 26" Bun Pan (end loading) 13" x 18" or 12" x 20" Hotel pan (side loading) Pan/Tray.
- **Approvals:** UL listed.
 C-UL listed.
 UL Sanitation Listed.

STANDARD FEATURES

- 12 hour timer for proofing mode
- For use with or without water
- Condensation drip trough, removable for cleaning
- Adjustable damper
- Removable louvered, back mounted vent stack for even heat distribution
- Polycarbonate door

OPTIONS

- Additional ledges for 1 1/2" spacing (18 sets)




Nor-Lake, Inc.
 Registered to ISO 9001:2000
 File No. A3204

WARRANTY

- 1 year parts
- 12 month labor

* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

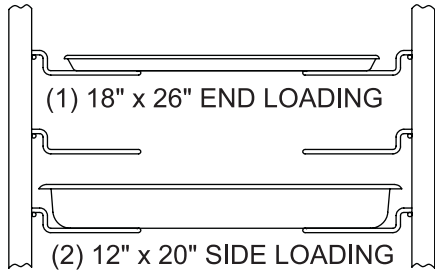


ALSO HOLDS (2) HALF SIZE
13" x 18" BUN PANS


SPECIFICATIONS

	HP6A-LX
Crated Height	75"
Crated Width	29"
Crated Depth	35"
Crated Weight (lbs)	180
Overall Height	71 3/4"
Overall Width	26 3/4"
Overall Depth	32 1/4"
Gross Cubage (ft.3)	44
Number of Casters	4
Electrical Characteristics	115/60/1
Cord & Plug Finished	Yes
Maximum Fuse Size	20
NEMA Plug Configuration	5-20P
Total Amp Draw	17

Specifications subject to change without notice

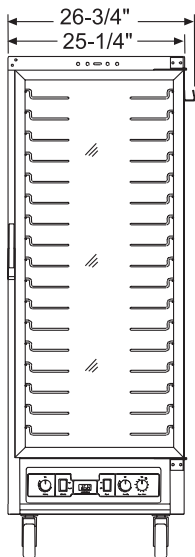

FRONT

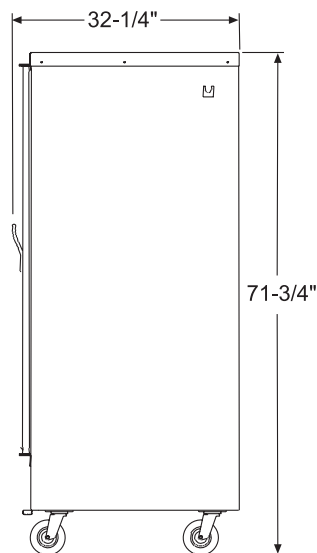

SIDE



Revision Date: 8/07
© 2006 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 132896

